


Artikel-Nr.: Typ/Hub	Kraft (daN)		L Min.	L	Gas Vol. (l)	Weight (Kg)
	Minimum	Maximum				
HDG.00420.006	420	700	50	56	0,003	0,13
HDG.00420.010		690	60	70	0,005	0,15
HDG.00420.016		690	75	91	0,008	0,18
HDG.00420.025		690	95	120	0,011	0,22
HDG.00420.032		760	108	140	0,021	0,24
HDG.00420.040		760	125	165	0,026	0,27
HDG.00420.050		760	145	195	0,032	0,31

**Hinweis:**

Spezial-Hublängen auf Wunsch möglich.



**Bestellbeispiel:** Typ x Hub + Befestigung

HDG.00420.050.FF




**Nur Nitrogen verwenden!**

Max. Druck: 150 Bar	Min. Druck: 20 Bar	Max. Kolbengeschwindigkeit: 0,8 m/Sek.
---------------------	--------------------	--

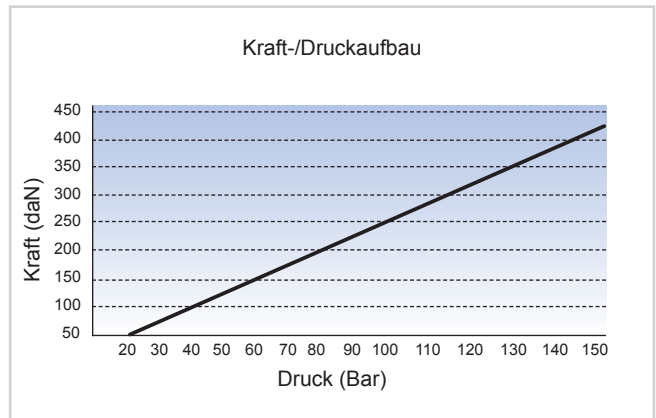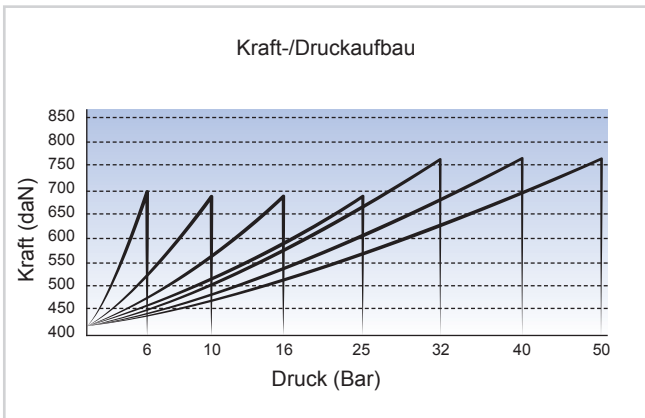

**Befestigungsvarianten**

(Alle Abmessungen in mm.)




Sackloch



Front Flange 25 FF



M6 Gewindebohrung



End Support 25 ES